


DISCOVER
THE OISIPIC
STANDARD LINE

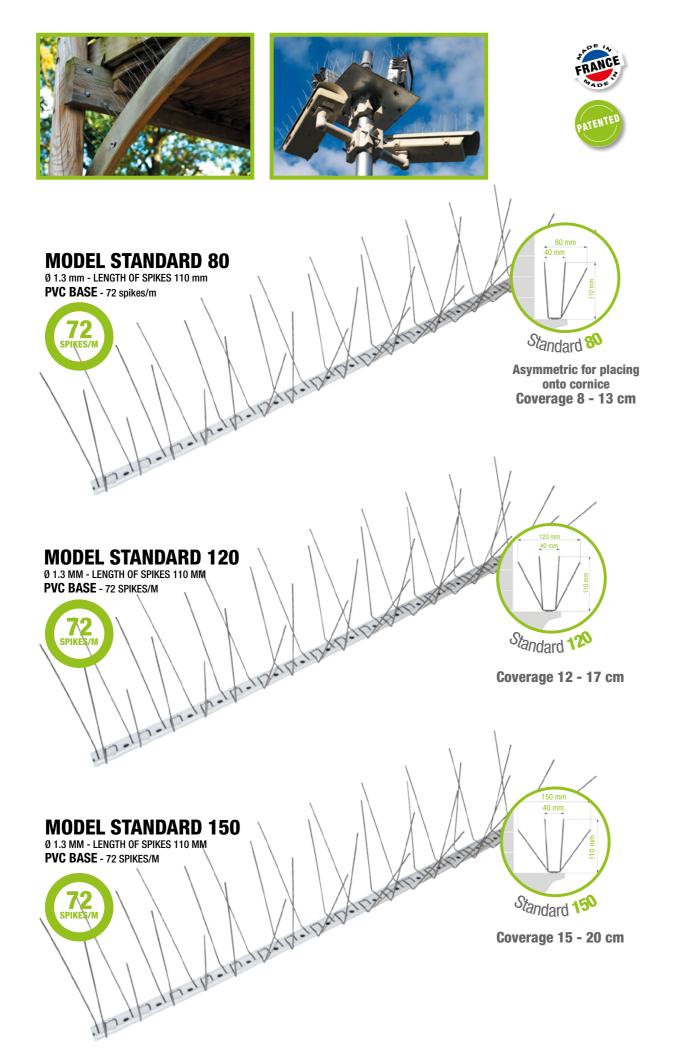

## **DESCRIPTION**

## Material:


• Spikes: AISI 302 stainless steel, Afnor X10 standard CrNi 18-8

Base: PVC

**Strength:** 1760 to 2010 N/mm<sup>2</sup>

Strip length: 50 cm

**Spike length:** 110 mm  $- \emptyset$  1.3 mm

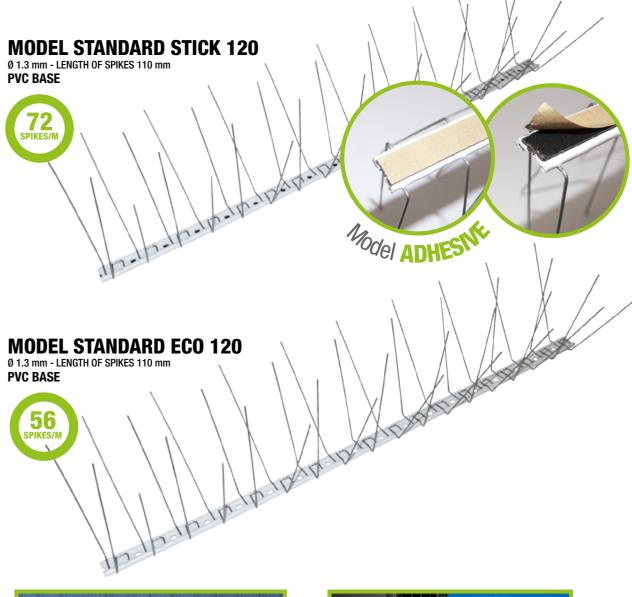







**CAN BE GLUED AND FLEXIBLE.** E.g.: shop sign




The PVC base can be glued to any surfaces using appropriate bond.



The PVC base includes holes for mechanical fastening.



The strips are bendable and thus adapt to any supporting element.

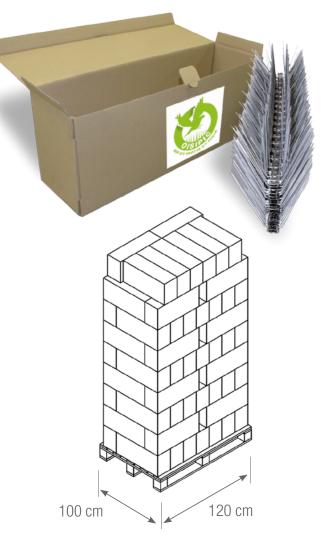

# SUITABLE PACKAGING

• 25 m box



**OPTIMAL** STORAGE AND SHIPPING

**Up to 1500 ml** 

## **FUNCTION**

- The STANDARD line includes 5 models each with a PVC base and stainless spring steel spikes.
- PVC Base for very high UV resistance.
- · Highly flexible.
- Strips 50 cm in length.
- Aisi 302 stainless spring steel spikes, 11 cm in length and 1.3 in diameter.
- 72 spikes per meter for models 80, 120, 150, and STICK.
- 56 spikes per meter for the ECO model.
- Our wide range of OISIPIC products will enable you to cover any surface from 80 to 200 mm wide.

## **RECOMMENDATIONS**

- CHABANNE will not be held liable for support elements that do not comply with the intended purpose.
- OISIPIC can be installed on all kinds of surfaces. CHABANNE will not be held liable for how OISIPIC products are mounted.
- Wear personal protection equipment when handling OISIPIC (gloves, goggles etc.).
- Keep the product out of the reach of children.



**ROUTE DE RIVAS - BP 16 - 42330 SAINT-GALMIER** 

E-mail: batiment@chabanne.com - Tel.: +33 (0)4 77 36 34 84 - Fax: +33 (0)4 77 94 95 07

